

Features:

- Consists of 1 Clock lane and 2 Data lanes
- Supports the MIPI Standard 1.1 for D-PHYSM
- Supports both high speed and low-power modes
- 80 Mbps to 1.5Gbps data rate in high speed mode
- 20 Mbps data rate in low-power mode
- High Speed Deserializers included
- Low power dissipation
- Loopback testability support

General Description:

The MXL-PHY-CSI2-RX⁺ is a high-frequency low-power, low-cost, source-synchronous, Physical Layer that supports the MIPI® Alliance Standard for D-PHY.

The IP is configured as a MIPI slave optimized for camera interface applications (CSI2).

The High-Speed signals have a low voltage swing, while Low-Power signals have large swing. High-Speed functions are used for High-Speed Data traffic while low power functions are mostly used for control.

Block Diagram:

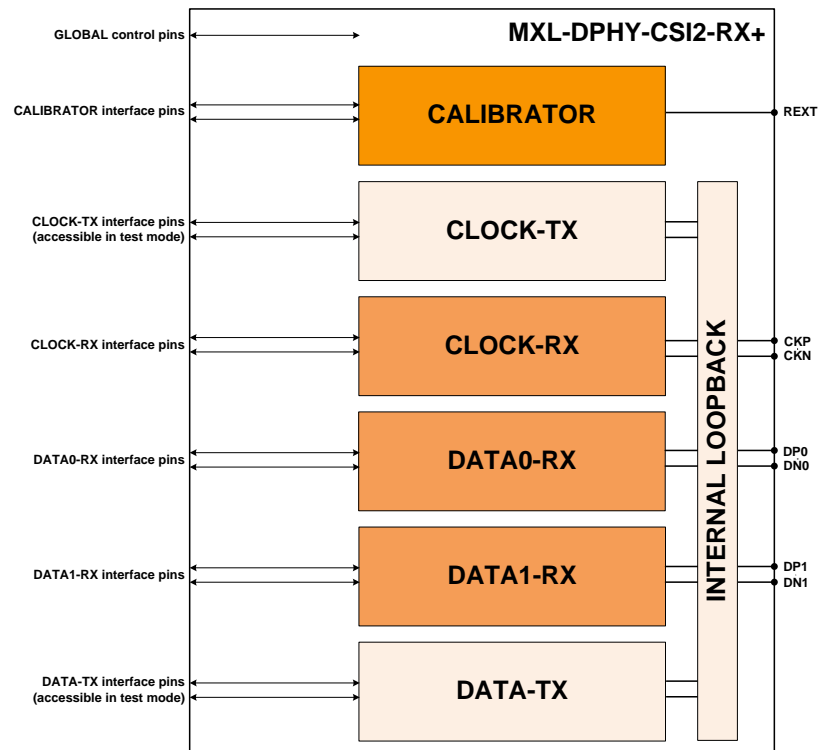


Figure 1 – MIPI DPHY CSI2-RX⁺ Block Diagram